# HERDER kelkraščių priežiūra

Katalogai kelio zonų, šlaitų, žolės ir gyvatvorių priežiūrai

## Kortelė: Kelkraščių priežiūra

## Įtraukti PDF katalogai:

- attachments.pdf (4 psl.)
- 84_Eng - Rapier folderkader.pdf (2 psl.)
- 56_Cavalier Eng.pdf (4 psl.)

HERDER

# HERDER® Attachments







Your machine will be usable the whole year when you have one of these attachments on your HERDER® boom! Through this you can earn to repay your investment quickly













MACHINE FACTORY HERDER B.V.

HERDER

## Verge maintenance (Eco mower)



Standard Eco mower



Eco mower with auger unit for suction



Eco mower with bottom fraise



More material will run through in case of a hydraulically folding front side



A heavy conveyor belt to work under extra difficult conditions



A standard conveyor belt to work under normal conditions

## Eco mower differences of flails



Flails 40x12



Wood flails

## Eco mower Options



Hydraulic rotation head 90° (SS.HD90)



Hydraulic rotation head 180° (SS.HD180)



Hydraulic rotation head 90° with mechanical free travel construction (SS.HDP90)



Hydraulic rotation head 180° with mechanical free travel construction (SS.HDP180)



Worm wheel with hydraulic free travel construction (SS.HWHP180)



Worm wheel with mechanical free travel construction (SS.HWP180)

HERDER

## Verge maintenance (continuation)



Disc mower (SMM170.SS)



Guard rail mower appropriate for suction (VRMA.SS)



Standard guard rail mower (VRM.SS)





Dredging bucket (BL150.SS). Also available in lenghts of 100-150-200 cms

## Slope maintenance



Top mower Busatis (TMB225.SS)



Bowed Top mower (TMB200/70.SS)



Excavator bucket 60 cms (GB60.SS)



Mowing rake combination



Top rake light (THL13.SS)



Top rake heavy (THZ13.SS)

MACHINE FACTORY HERDER B.V.

## Trees and hedges


Heavy stump cutter (SFV800.SS)


Threefold saw unit with double rotation head (CZH3x75.SS.HD105HK)


Saw unit (CZ90.SS)


Hydraulic tree cutter (KSZ75)


Heavy hedge cutter with double rotation head (HGR300.SS.HW180HK)


Light hedge cutter (HSR150-180-250)


With a hedge topper it is possible to mow and to shred in one movement


Stump cutter light (SFL35.SS)



Hedge topper. To be used in each position (SGMH150.SS.HD90 HW180HK)

## Special attachments


Weeds brush (OB.SS)


Hydraulic water pump 6500 ltrs/min. (WHP1.SS)


HERDER B.V., P.O. Box 8010, NL-4330 EA Middelburg
Telephone +31 (0)118 679 500
Spare parts +31 (0)118 679 550
Fax +31 (0)118 638 730
Herculesweg 6, Industrial zone "Arnestein", NL-4338 PL Middelburg
E-mail: sales@herder.nl"
Website: http://www.herder.nl



Dealer:

# HERDER®

# Rapier MBK 180




The **Rapier MBK 180** combines the already proven HERDER® quality with the high hydraulic capacity, high-quality engineering and the flexability, which we already know. With this mowing arm you will be ensured of remarkable performances at point of delivery.
There is a choice of reaches of 130 or 150 cm with different types of flails for grass and hedge maintenance.
The multifunctional hydraulics makes it possible to work with a top mower or hedge cutter without any adaptations. The longest reach can be on the left or right hand side, as desired.

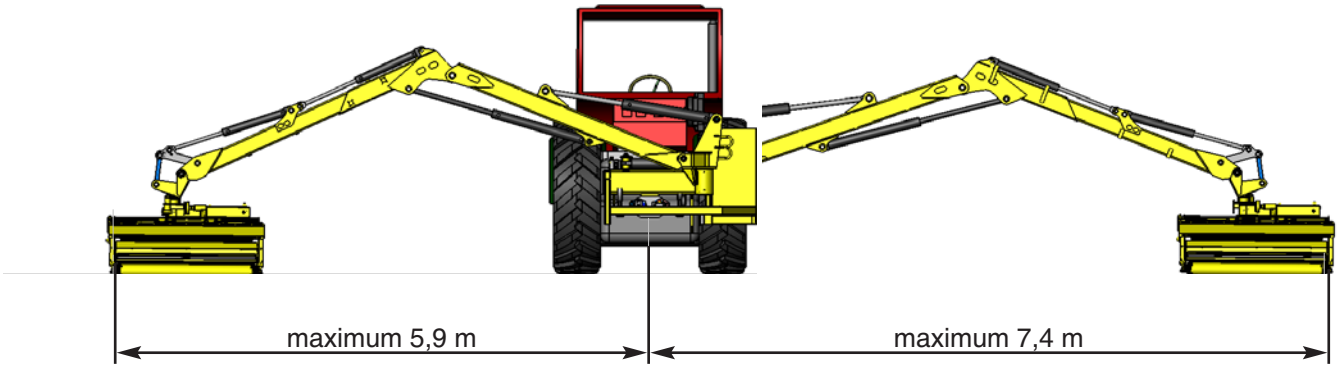


**Machine factory HERDER B.V.**

P.O.Box 8010
4330 EA MIDDELBURG
the NETHERLANDS
Tel: +31(0)118-679500 Fax: +31(0)118-638730
Herculesweg 6, Industral area "Arnestein"
4338 PL MIDDELBURG
E-mail: sales@herder.nl
Internet: http://www.herder.nl

MEMBER OF ECOLOGY GROUP

HERDER

# Technical specifications HERDER® RAPIER MBK 180

**Standard equipment:**
- Plunger pump with capacity at 540 rpm at PTO:
  - 150 bar at 0 – 40 L for a hedge cutter for example
  - 330 bar at 90 L for a flail mower, 50 kW capacity on the rotor
- Hydraulic oil tank capacity: 150 litre
- Weight 1735 kg without attachment
- Lifting capacity: 600 kg
- 180 degree operation to the left and right hand side
- Fully proportional electronic control with one joystick
- Class leading electro hydraulic float system
- Electric control box in cabin
- Mounted in 3 point linkage with support to the rear axle
- Support legs for easy disconnecting are integrated








**Can be provided with:**
- Flail mower: 130 – 150 cm
- Hedge rotor mower 180 cm
- Disc mower 165 cm
- Mowing bucket 250 cm
- Hedge cutter 150 – 300 cm
- Top mower 190 – 220 cm

**Tractor requirements:**
- minimum tractor weight: 6.500 kg
- rear axle needs sufficient load capacity






HERDER

MACHINE FACTORY HERDER B.V.

# HERDER® Cavalier MBK 120



This machine is strong because of its price – quality relation









HERDER

## Transport



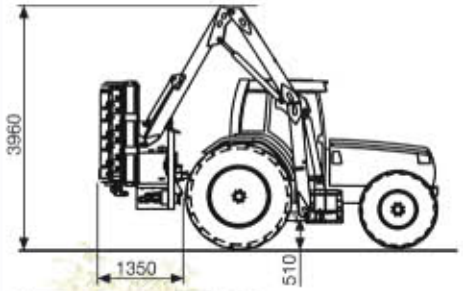

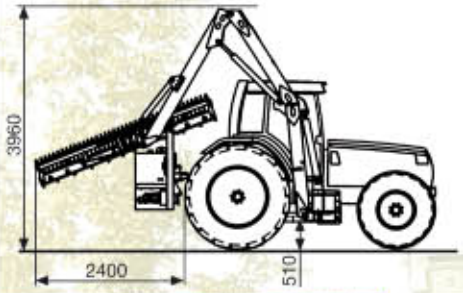
Transport height with Eco mower 150 cms will be max. 4 m.

## Supporting frame



Supporting frame standard constructed with oil cooler, tool box and lighting



Transport height with 3 m. mowing bucket will be max. 4 m.

## Operation



- Standard electrical 1-handle control
- Attachment on- and off to operate from joy-stick
- Electrical floating position (adjustable) with a separate pump
- Electrical flowing position

## Stabilization cylinder



Standard stabilization cylinder



Stabilization cylinder for suspension front axle

HERDER

## Optional equipment at extra cost



Supporting wheel for more stabilization




Hydraulic operating sliding boom – slided in



Supporting plate for mowing buckets




Counterweights




Sliding boom 70 cms. – slided out

MACHINE FACTORY **HERDER B.V.**



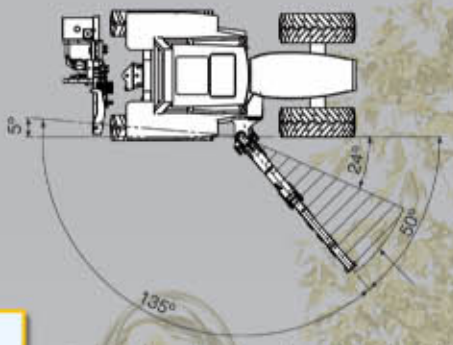

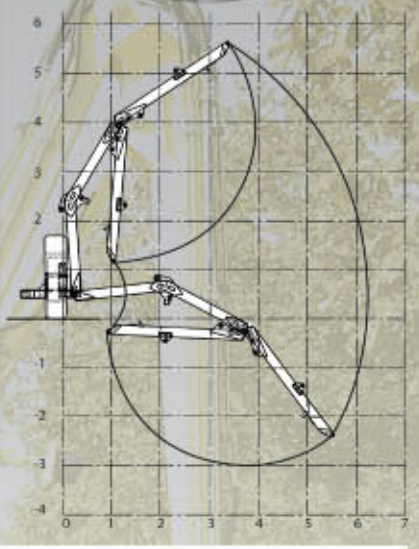
| **Technical details Cavalier MBK120** | |
|---|---|
| Pump capacity at 540 revs/min. PTO | |
| • Attachment 150 bar | 0-40 ltrs |
| • Attachment 330 bar | 90 ltrs |
| • Floating position | 14 ltrs |
| • Control valve | 60 ltrs |
| • Minimal tractor power | 60 kW |
| • Minimal tractor weight | 4500 kgs |
| • Minimal built-in measurement | 100 cms |
| • Oil cooler | yes |
| • Hydraulic oil tank capacity | 150 ltrs |
| • Lifting capacity with standard boom length | 600 kgs |
| • Standard reach of the boom including mowing bucket | 705 cms |

**Optional equipment at extra cost**

- Supporting wheel or supporting leg, control through tractor hydraulics
- Extra hydraulic supplies to drive, adjust and control of special attachments
- Sliding boom 70 cms., control through tractor hydraulics
- Disconnecting construction for the machine


HERDER B.V., P.O. Box 8010, NL-4330 EA Middelburg
Telephone +31 (0)118 679 500
Spare parts +31 (0)118 679 550
Fax +31 (0)118 638 730
Herculesweg 6, Industrial zone "Arnestein", NL-4338 PL Middelburg
E-mail: sales@herder.nl"
Website: http://www.herder.nl


Dealer: